

STEP

1 2 3
prep prime

finish

Decks

EXTERIOR - WATER BASED

Ideal for Timber decking and garden furniture

PRODUCT DESCRIPTION

Boscote Decks is a hard wearing, transparent, water-based finish for exterior use. It incorporates the latest technology in UV absorbers. **Decks** maintains slight flexibility to resist film cracking and peeling with the natural movement of timber. **Decks** enhances the natural colour & warmth of timber whilst filtering UV light and resisting water ingress.

RECOMMENDED USES

Decks is suitable for decking, doors, windows, balustrades and outdoor furniture (contact surfaces). We recommend using **Boscote Cladcoat** for vertical surfaces, weather boards, cladding, pergolas, fascias and fences (non contact surfaces).

DIRECTIONS FOR USE

Stir thoroughly with a broad, flat paddle, before and during use. This keeps pigment evenly dispersed in the product during its application, maintaining uniform colour across the surface

SURFACE PREPARATION

IMPORTANT: All timbers are different, please read the preparation instructions for details on how to treat different timbers. For further information on Boscote Timber Coatings please refer to the Boscote website or the Technical Data Sheet.


APPLICATION INSTRUCTIONS

1. Use **Woodwash** to clean & prepare surface to be coated with **Decks**. Allow surface to dry. Some scrubbing using a hard bristle deck brush maybe required to restore old weathered timber or heavily stained timber. The surface must be clean & dry for best results, only use exterior grade water based putty to fill any nail/screw holes.
2. Apply a saturation coat of **Boscote Prime All UV** as per can instructions. Allow a minimum of 4 hours drying time before over coating with **Decks**.
3. Stir **Decks** thoroughly before application of 1st Coat and periodically while applying
4. 1st coat apply a full and generous coat of **Decks** evenly with the grain of the timber using a paint roller, pad applicator or paint brush working it into the timber as you go. Apply to the full length of 2-3 boards at a time, finishing at a join in the timber. Keep a wet edge to avoid lap lines. Be sure to apply finish to the exposed edges of the timber using a paint brush. Allow **Decks** a few minutes to penetrate into the timber. Brush or roll off any excess finish, do not allow pools of product to dry on the timber. Allow to dry minimum of 4 hours before applying second coat.
5. Apply a 2nd coat following the procedure in step 1 above.

PRECAUTIONS

Bostik does not recommend thinning or mixing any of its products with other coatings or products from other manufacturers.

See technical data sheets for further information.

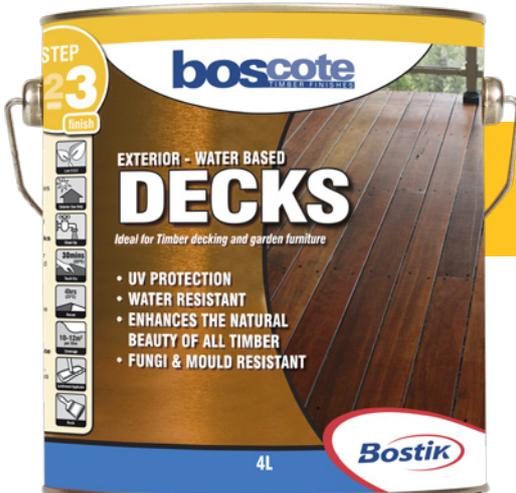

- UV PROTECTION
- WATER RESISTANT
- ENHANCES THE NATURAL BEAUTY OF ALL TIMBER
- FUNGI & MOULD RESISTANT

BASIC DATA

Gloss Level	Satin
Drying Time	30 minutes touch dry
Recoat Time	4 hours
Clean Up	Water
Coverage	Rough Sawn Timber 4-8m ² per litre*
	Dressed timber 10-12m ² per litre*

*Coverage rates are estimates only as timber species and application technique can affect the coverage rate of this product.